




Department of Community Development • Building Division


(818) 932-5527
 (818) 359-3231 Ext. 327
 FAX (818) 359-8507

Parking Stall Requirements for Persons with Disabilities

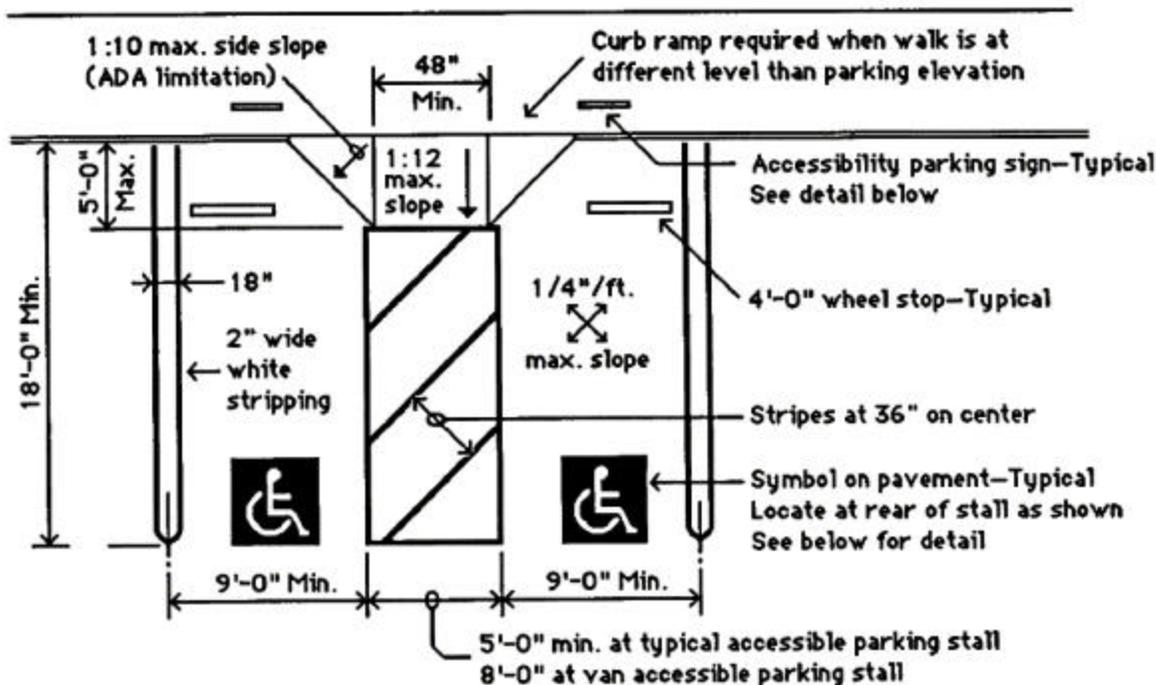


Note: When only one space is provided, the access aisle shall be provided on the passenger (right) side of the parking stall.

70 sq. in. min. pole or wall mounted sign. Van accessible parking stalls shall have an additional sign which reads: "VAN-ACCESSIBLE"



PAVEMENT MARKING
 Symbol (wheelchair with occupant) must be in white on a blue background

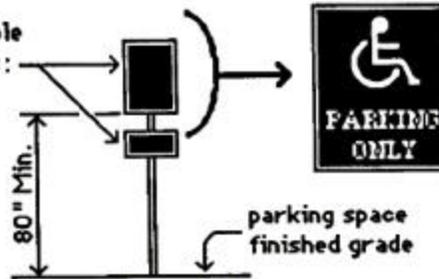

POLE OR WALL SIGN
 Symbol (wheelchair with occupant) must be in white on a blue background

SPACES REQUIRED

Total Number of Parking Spaces in Lot or Garage	Minimum Required Number of Accessible Parking Spaces	Total Number of Parking Spaces in Lot or Garage	Minimum Required Number of Accessible Parking Spaces
1-25	1	301-400	8
26-50	2	401-500	9
51-75	3	501-1000	2% of total
76-100	4	1001 and over	20 plus 1 for each 100 or fraction thereof
101-150	5		
151-200	6		over 1001
201-300	7		

Note: When less than five parking spaces are provided, a 9 foot wide accessible parking stall with a 5 foot wide access aisle shall be provided, but this stall need not be reserved exclusively for identified for use by persons with disabilities.

VAN ACCESSIBLE STALLS

One in every eight accessible spaces shall be a van accessible stall which is served by an 8 foot wide access aisle. Van accessible stalls shall be appropriately signed. All such spaces may be grouped on one level of a parking structure. There shall be not less than one van accessible stall in each parking lot or structure.

ARRANGEMENT OF ACCESSIBLE PARKING STALLS

Spaces shall be provided adjacent to each building entrance as close as practical to that entrance. Spaces shall be so located that persons with disabilities are not compelled to wheel or walk behind parked cars other than their own.

SLOPE OF ACCESSIBLE PARKING STALLS

Surface slopes of accessible parking stalls shall be the minimum possible and shall not exceed 1/4 inch per foot (2.083 percent gradient) in any direction.

CLEAR HEIGHT WITHIN PARKING GARAGES

Within parking garages there shall be a minimum clear head room of 8 feet 2 inches at all van accessible parking stalls and the route of vehicular travel from the entrance to such stalls. Sprinkler pipes, ducts, etc. shall not encroach into the required clear head room.

SIGNS AT ENTRANCES

Each entrance to off street parking shall be posted with a sign which is not less than 17 inches by 22 inches having letters 1 inch in height which reads:

Unauthorized vehicles parked in designated accessible spaces not displaying distinguishing placards or license plates issued for persons with disabilities may be towed away at owner's expense. Towed vehicles may be reclaimed by telephoning (818) 359-1152 (Police Dept.).